



Electronic Level Transmitter with Screwed Flange - Side Mounting

The PL3701-I -S Electronic Level Transmitter is a linearized, ceramic device specially designed for petroleum and chemical applications. It features an IP68-rated sensor through 316 L stainless steel housing and shielded polyester cable.

The 316L stainless steel remote electronics box intended for deck installation includes an amplifier with zero and span adjustment. Optional flexible conduits can be supplied for watertight connections on deck

PL3701-I-S - Technical Specifications

Technical Data

Range:	120 mbar to 4 bar.
Accuracy:	± 0,3% FS at 20°C
Overpressure:	6 to 25 bar.
Output signal:	4-20 mA, 2-wires
Protection class:	- Sensor: IP68 - Remote box: IP66
Intrinsic safety:	IECEX, ATEX. II 1 G D Ex ia IIC T6 Ga or Ex ia IIB T6 Ga Ex ia IIIC T80°C Da IP66/67 (Max 50m cable between sensor and remote electronic box).

Power supply:	12-28 Vdc
Operating ambient temperature:	- 20°C to + 70°C
Cable length:	3m in standard (option: up to 50m)

Special Features

Material:

- Remote box: Stainless steel 316L.
- Sensor: Stainless steel 316L.
- Diaphragm: Ceramic.
- Flange: Stainless steel 316L.
- Cable: Polyethylene (fire retardant).

Recommended zener barrier for installation in hazardous area : MTL7787+.

Sensor up to max 120°C.

Polyethylene cable up to max 60°C (standard).

PTFE cable up to max 120°C (optional).


2 or 3 flexible conduits (optional).

Screwed ISO flange: PN40DN25 or PN16DN40


Technical Documentation

Installation manual:	MI5090
Technical manual:	NT5090
Maintenance manual:	MM5090


Mechanical Fittings & Dimensions

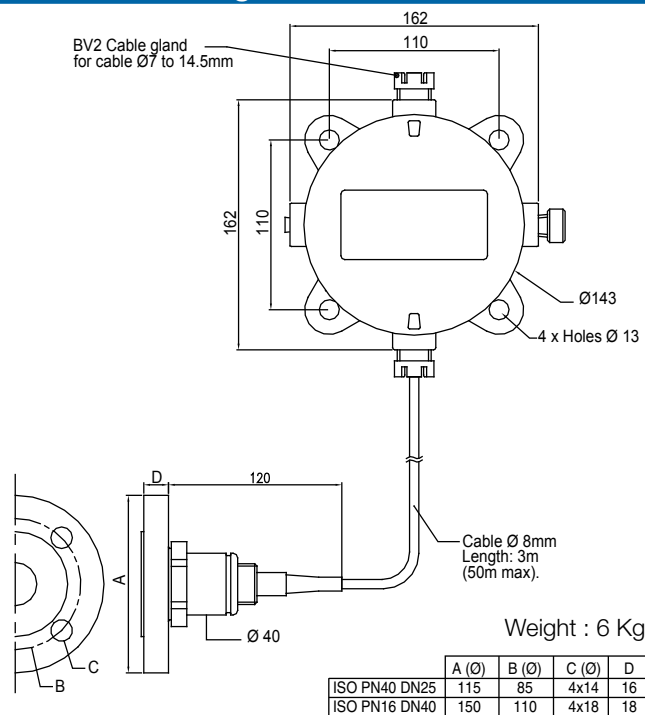

Process Connection

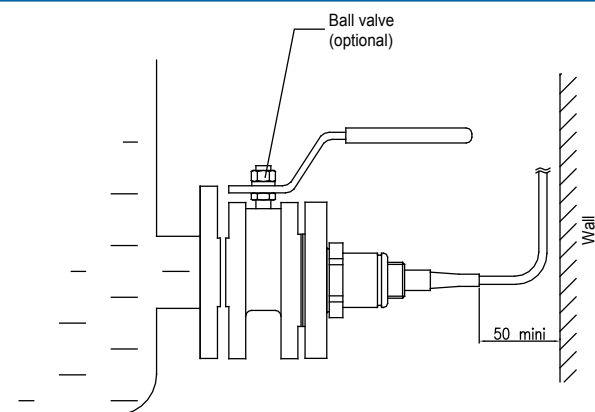

Electrical Connection

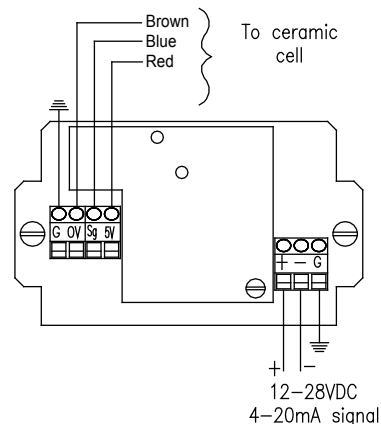

Honeywell Marine SAS

9, rue Isaac Newton

ZA Port Sec Nord, Esprit 1

18000 Bourges – France

Phone : + 33 (0) 248 237 901

Fax : + 33 (0) 248 237 903

E-Mail: contact.marine@honeywell.com

www.honeywellmarine.com

HM-11-20-ENG
February 2013
© 2010 Honeywell International Inc.

Honeywell